

KOINE 4 KOINE 5


Plaster sprayers for dry premixed materials

Standard Equipment

- ✓ Three-phase 400V/50Hz motor – 7.75 kW
- ✓ Electric diaphragm compressor
- ✓ Bag breaker grid
- ✓ Mixer gear motor
- ✓ Feeding wheel gear motor
- ✓ Stator and Screw D6-3
- ✓ Material delivery pressure gauge
- ✓ Electric supply and control panel
- ✓ Self-priming water pump
- ✓ Water system
- ✓ 4 swivel casters (1 of which with brake)
- ✓ 40 m electric cable
- ✓ 40 m water hose (Koine 4)
- ✓ 30+4 m water hose (Koine 5)
- ✓ 15 m hose for material Ø 25 with quick couplings
- ✓ 16 m air hose Ø 13 with quick couplings
- ✓ Accessory box with gun and connectors
- ✓ Cleaning accessories (scraper and sponge)
- ✓ Preset for self-levelling screed kit
- ✓ Safety devices according to the latest CE standards

APPLICATIONS

For mixing and spraying premixed materials in bags or from silo (limecement base plasters, gypsum, insulations).

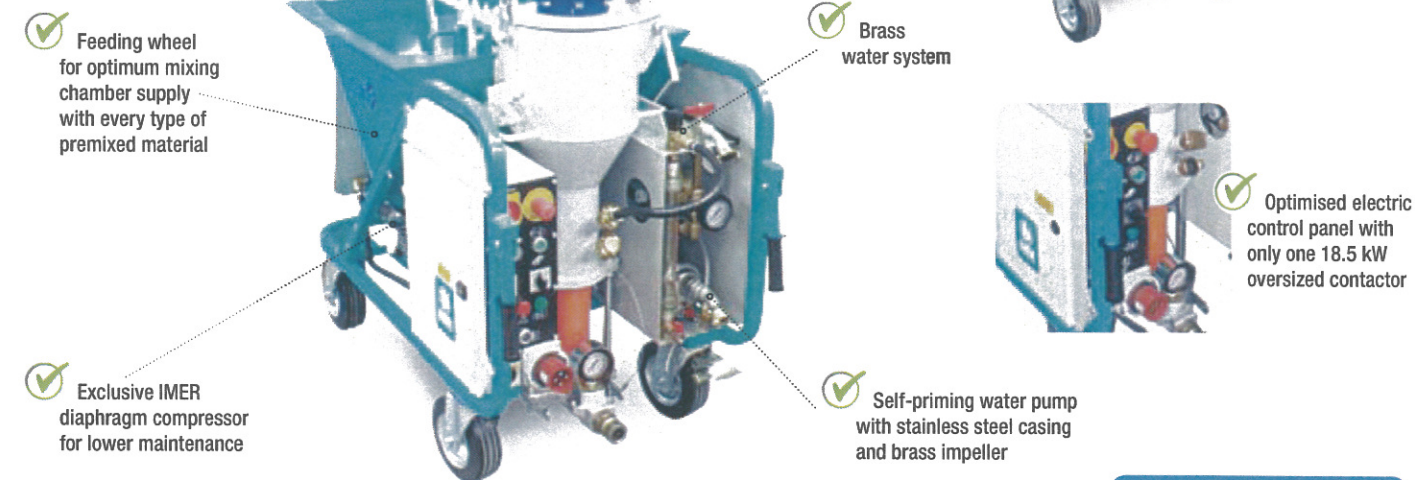


ACCESSORIES



		Koine 4	Koine 5
Supply	-	400V/50Hz	400V/50Hz
Max. installed power	kW	7,75	7,75
Mixing motor power	kW	5,5	5,5
Feeding wheel gear motor power	kW	0,75	0,75
Electric compressor	-	kW 0,9 l/min 250	kW 0,9 l/min 250
Material flow rate	l/min	22	22
Maximum pumping distance with Ø 25 mm hose	m	25	-
Maximum pumping distance with Ø 35 mm hose	m	-	50
Hopper capacity	l	110	110
Loading height	mm	900	900
Dimensions width/length/h	mm	730/1190/1560	680/1190/1560
Weight	kg	263	263
Sound pressure level	dB (A)	< 80	< 80

(*) NOTE The pumping distance may vary depending on: the type of material used, pumping height, material consistency, type of pump installed.

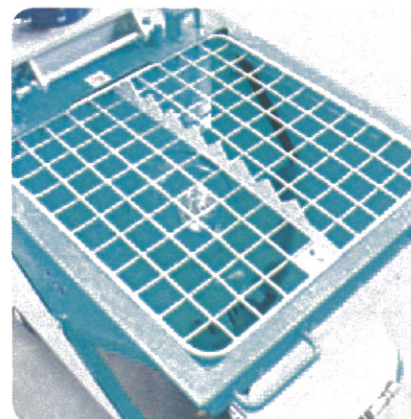

Bag breaker grid