

PORTABLE & POWERFUL


New! Original KOSHIN Engine High Performance & Economy

(1) Low fuel consumption. The original Koshin engine achieves the lowest fuel consumption.


Low Fuel Consumption

(SEV-80X case)

Comparison of Fuel Consumption

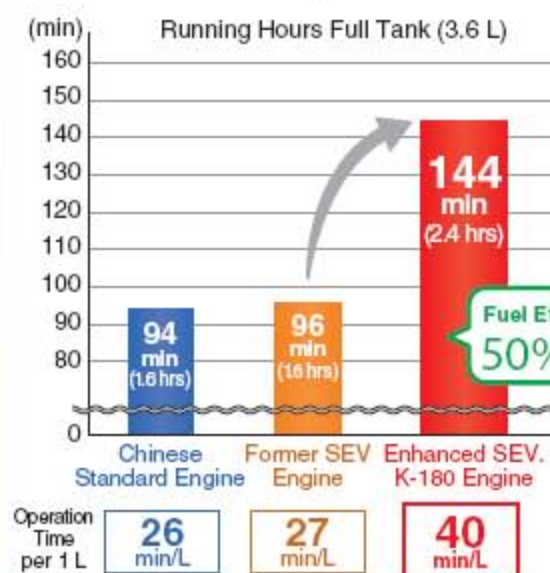

Comparison of Running Cost (Pump + Fuel)

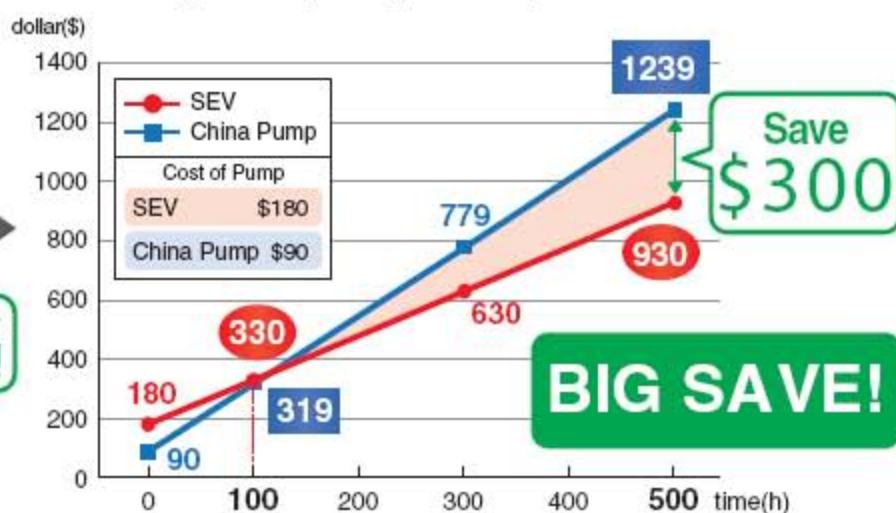

Remarks: Data was calculated IL gasoline = US\$1, Comparison SEV-80X vs Standard Chinese 3" pump

Low Vibration

Comfortable in use after reducing engine vibration.

(2) Low Vibration

Comfortable in use after reducing engine vibration.

Guaranteed Performance

Koshin guarantees 8 m suction head and specifications.

(3) Guaranteed performance

Koshin guarantees 8 m suction head and specifications.

Competitive Price & Guaranteed Quality Powered by Koshin Engine


GUARANTEED

- Engine & Pump spare parts service!
- Specification & Quality!
- Sales support!!



SEV-50X

Performance Curve

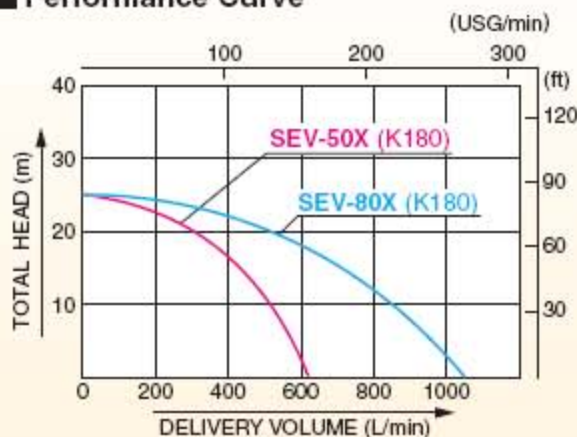

SEV-80X

Specifications

Model	SEV-50X	SEV-80X
Connection Dia	50 mm (2")	80 mm (3")
Connection Thread	Outer Pipe Thread BSP	
Total Head	27 m (90 ft)	
Delivery Volume	620 L/min (163 USG/min)	1050 L/min (277 USG/min)
Max. Suction Head	8 m (26 ft)	
Type	Forced Air-cooled 4-stroke Gasoline Engine	
Model	Koshin K180	
Exhaust Volume	179 cc	
Rated Output	3.1 kW (4.2 PS) / 3600 rpm	
Fuel	Automotive Unleaded Gasoline	
Fuel Tank Capacity	3.6 L (0.95 USG)	
Continuous Operating Time	Approx. 2.6 hrs	Approx. 2.4 hrs
Starting Method	Recoil Starter	
Standard Accessories	1 Strainer, 3 Hose Bands, 2 Hose Couplings, 1 Engine Tool Set	
Gross Weight	27.2 kg (59.9 lbs)	30.7 kg (67.6 lbs)
Dimensions L×W×H (mm)	504 × 401 × 411	543 × 426 × 458
Packing Unit	1	

*For the purpose of improvement, specifications are subject to changes without notice.